


SATUR ROTOTILLER CENTRAL TRANSMISSION 110 a 350 H.P.

TECHNICAL CHARACTERISTICS

- Axial roller protection and self-aligning rotor system.
- Special oil-tight cutting edges, with axial joint and labyrinth.
- Central special gear drive crankcase.
- Double chassis with over-shell and reinforced turret.
- For maximum shaft height of 65cm.
- Rear collector with pressure springs.
- Maximum depth 40 cm.
- For 1,000 r.p.m. shafts.
- With torque limiter transmission.
- 6 blades per disc, bolts and pins.
- Return gears with oil pump.
- 10 mm blades with 5/8" screws as standard.
- Crankcase protector and mechanical flaps as standard.
- Revolutions and characteristics adapted for high performance tractors.
- Swivelling coupling supports for adaptation to tiller for difficult ground.

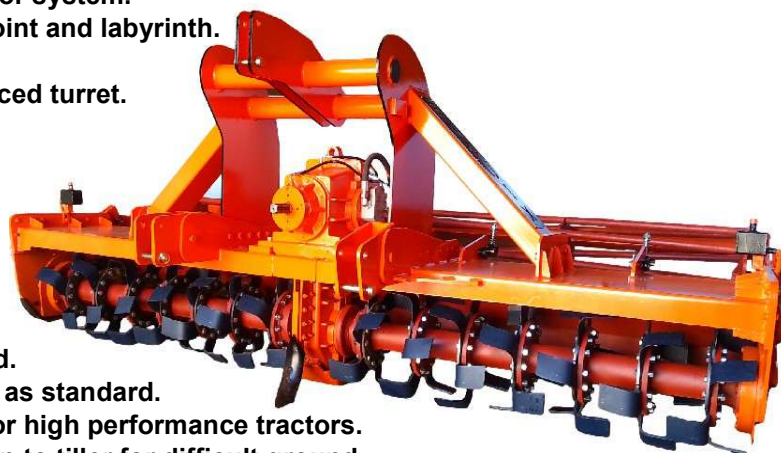

MODEL	Nº OF BLADES	CUT WIDTH MM.	TOTAL WIDTH MM.	MAX POWER H.P.	WEIGHT KG.
SATUR-25	48	2,390	2,500	110 - 350	1.800
SATUR-30	60	2,890	3,000	130 - 350	1.900
SATUR-35	72	3,390	3,500	150 - 350	2.100
SATUR-40	84	3,890	4,000	170 - 350	2.300
SATUR-45	96	4,390	4,500	190 - 350	2.500
SATUR-50	108	4,890	5,000	210 - 350	2.800

Options:

CODE	DESCRIPTION
14613	FOLDABLE HYDRAULIC FLAPS
01000	SPLINED TRANSMISSION
01172	TOP DISCS
	LATERAL GRILLE WITH END SUPPORTS
10512	SIDE DISC SET